

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F. UL94V-0

Ordering Information


3220 - XX R XX B X X 1

- | | | | | |
|-------------|-------------------|-----------------|---------------|-----------|
| No. of Pins | Contact Plating | Insulator Color | Latch type | Packaging |
| 08 30 | G0=Gold Flash | B=Black | L=Long Latch | T=Tube |
| 10 34 | G3=10u"Gold | U=Blue | S=Short Latch | |
| 14 40 | G4=15u"Gold | G=Grey(427C) | | |
| 16 44 | G5=30u"Gold | E=Grey(413C) | | |
| 20 50 | S0=Gold Flash/Tin | | | |
| 24 60 | S3=10u"Gold/Tin | | | |
| 26 64 | S4=15u"Gold/Tin | | | |
| 68 | S5=30u"Gold/Tin | | | |
| | SN=Tin | | | |

Item	Pitch	Mating
Standard	2.00	5222
Alternate		

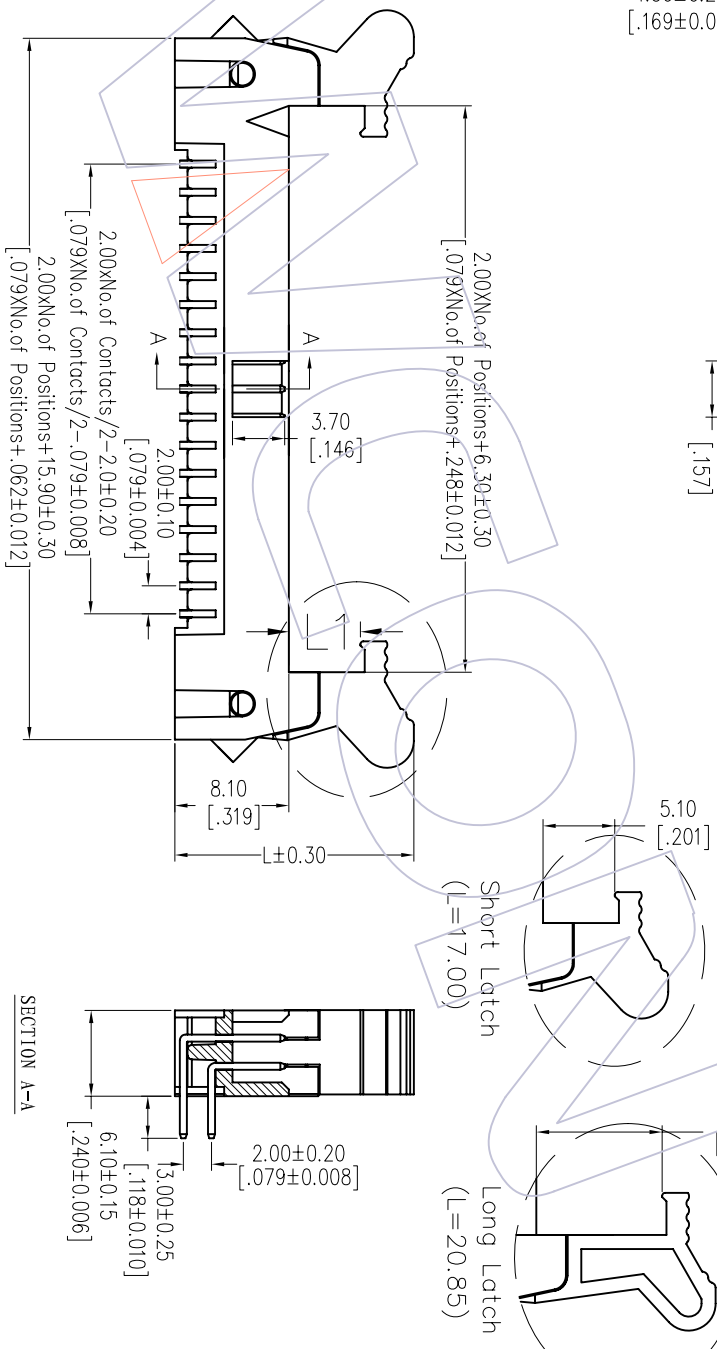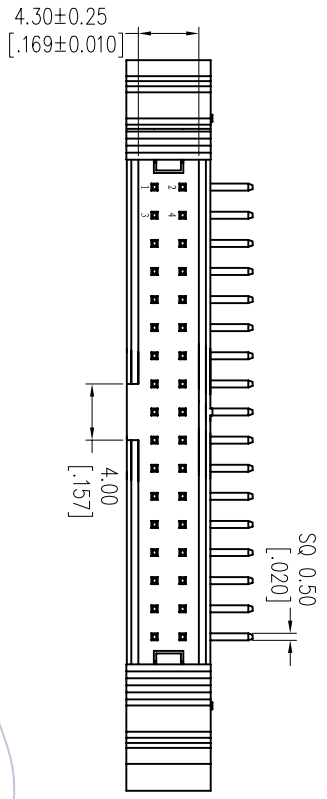

SECTION A-A

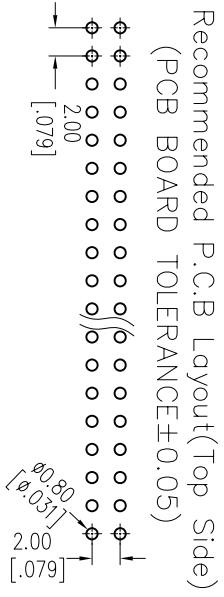

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/10/06	NEW		Angle	± 3'			1/1		3220-XXXXXX1	2.00 EJECTOR HEADER 90°	Tel: +86 769 85358920	Tel: +86 512 57468408
												Fax: +86 769 85358915	Fax: +86 512 57468468
												E-mail: sales@wcon.com	E-mail: sales@wcon.com

WCON

Http: www.wcon.com